




# Keying Schematic for 2 x 3 Pin Layout: 6 possible configurations

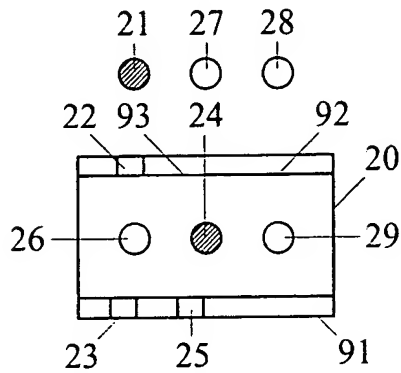


Configuration 1

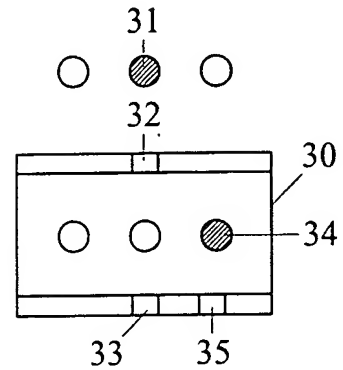


Configuration 4

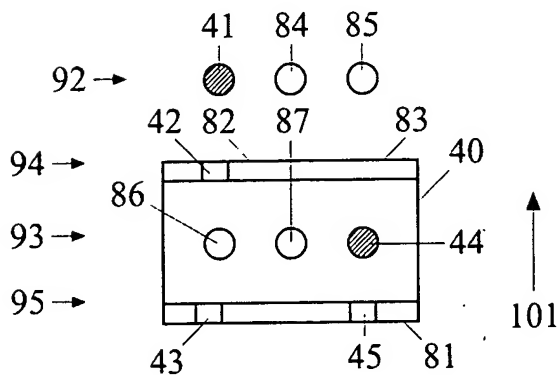


Configuration 2

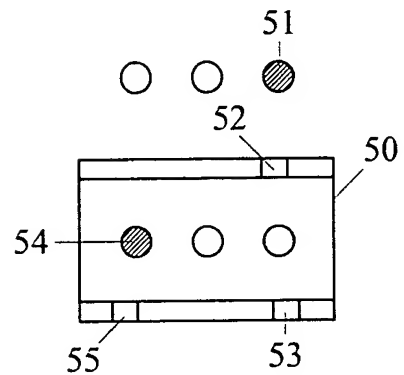

Configuration 5

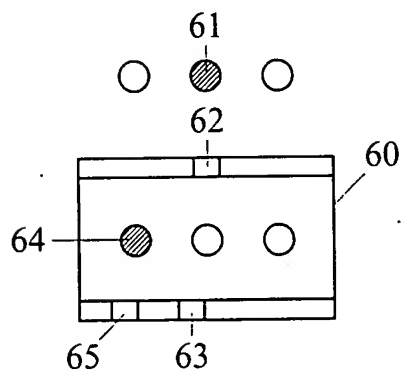

Configuration 3

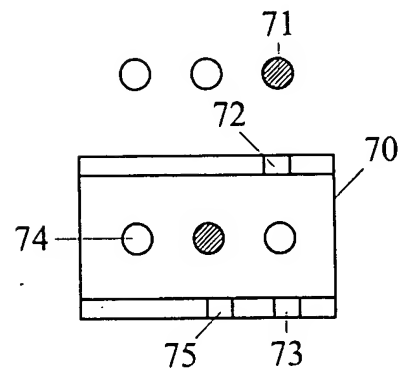

Configuration 6

FIG. 1

209290-6T40800T

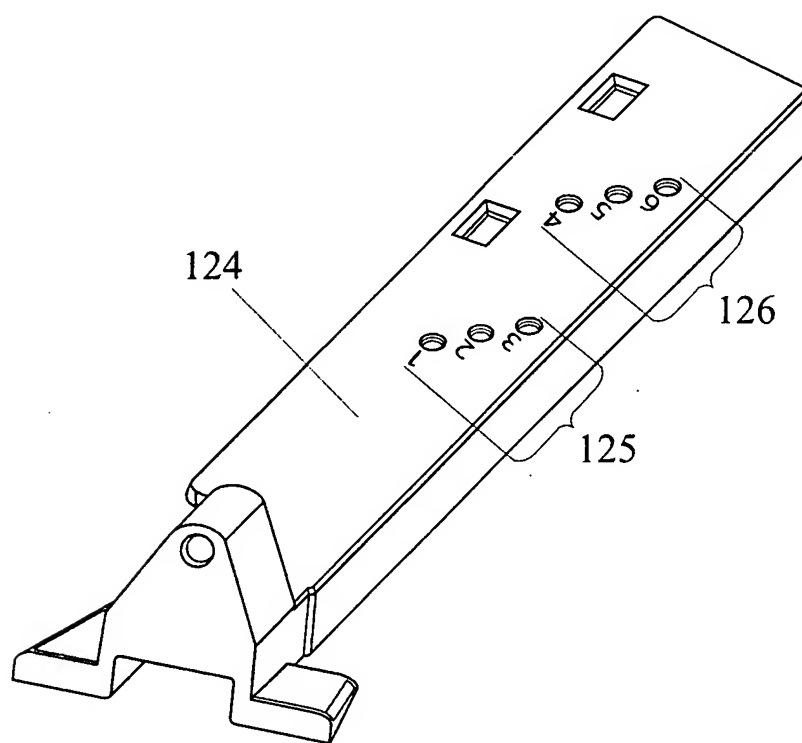


FIG. 2

10080419-062602

3/12

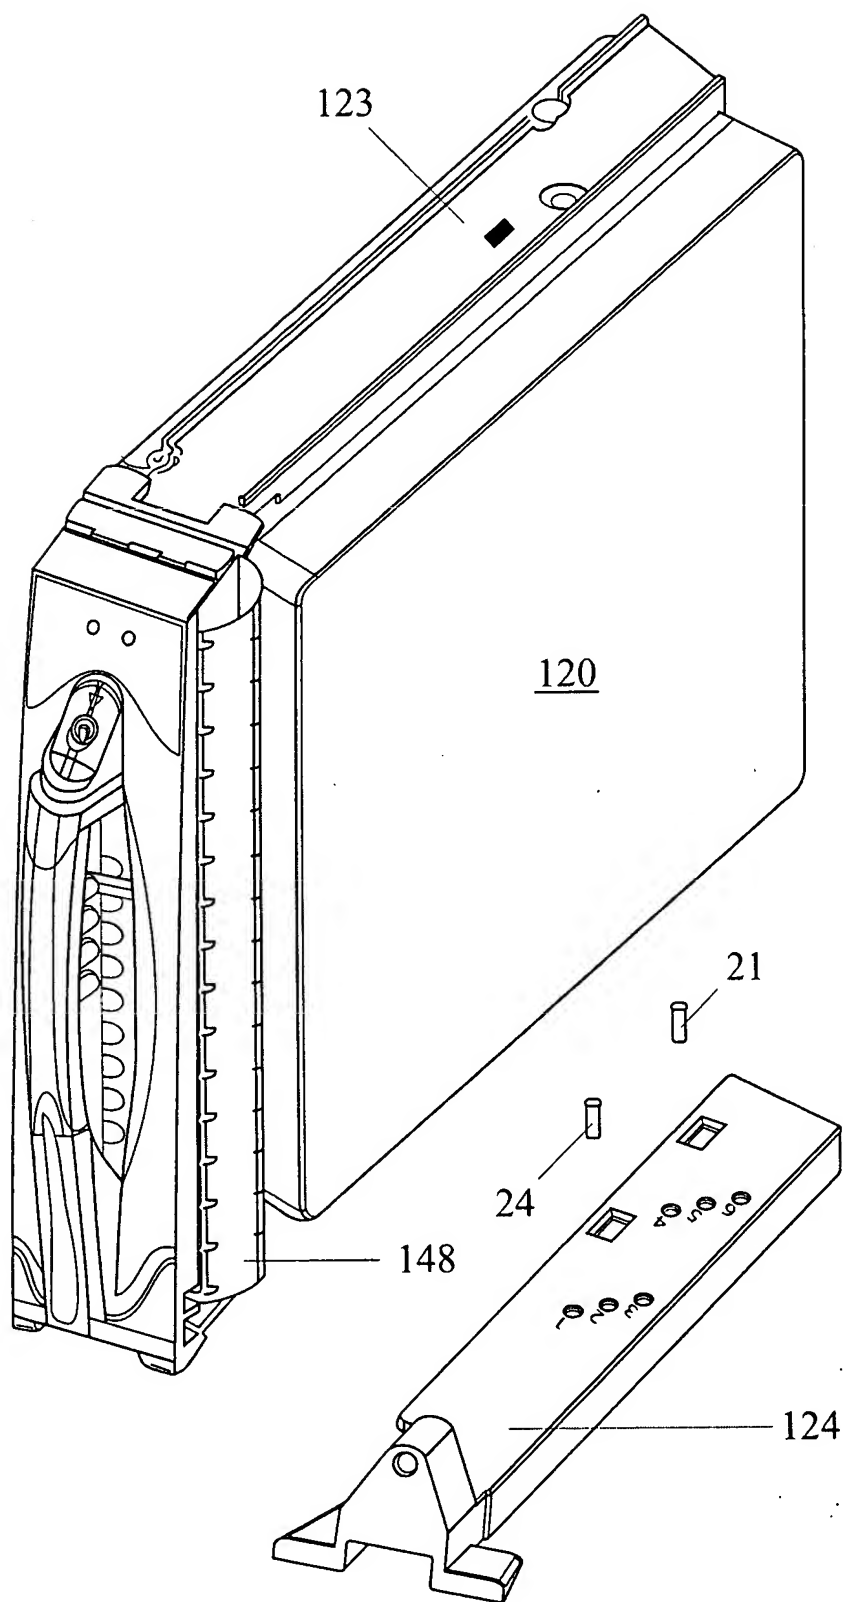


FIG. 3

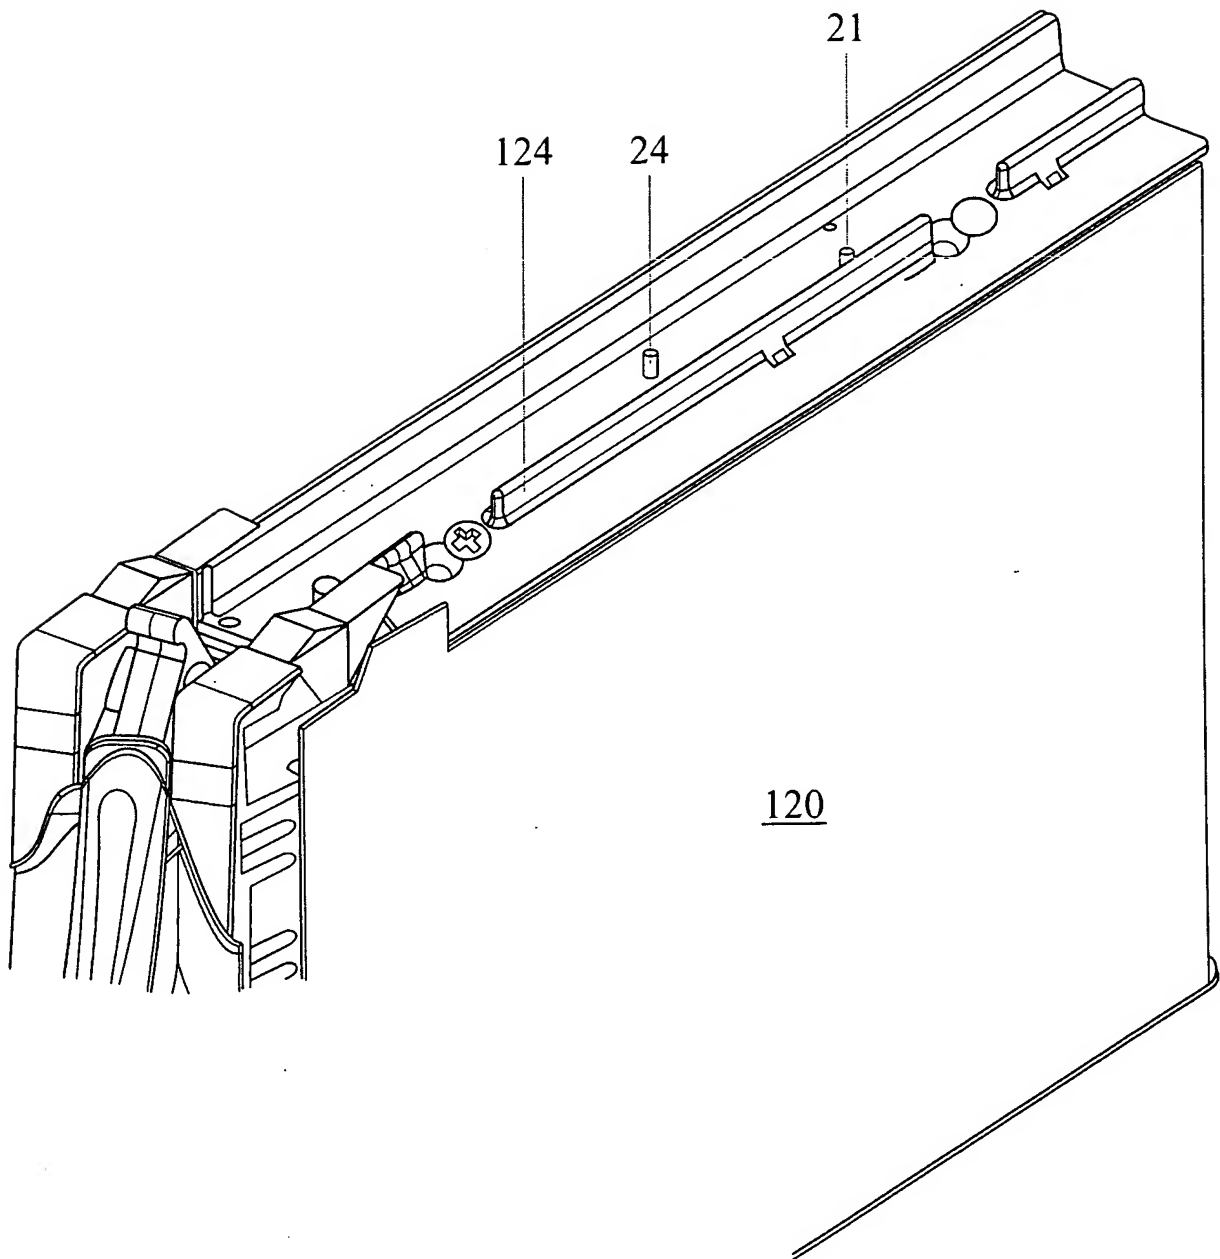


FIG. 4

209290-6T40800T  
5/12

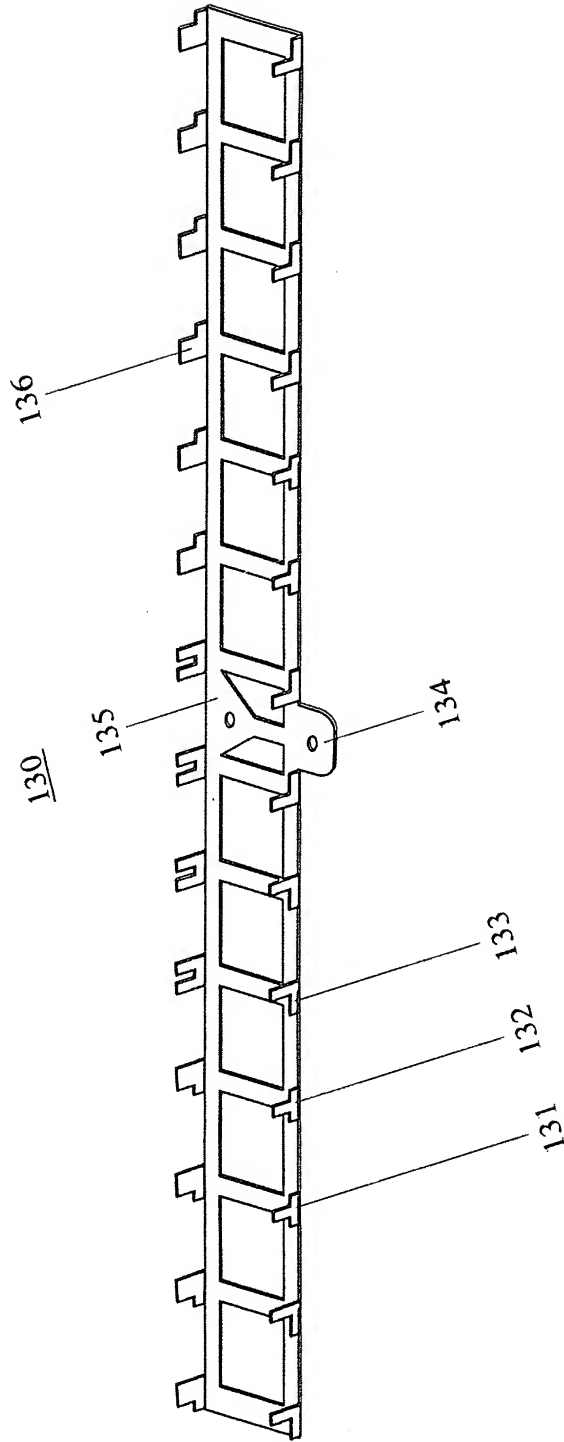


FIG. 5

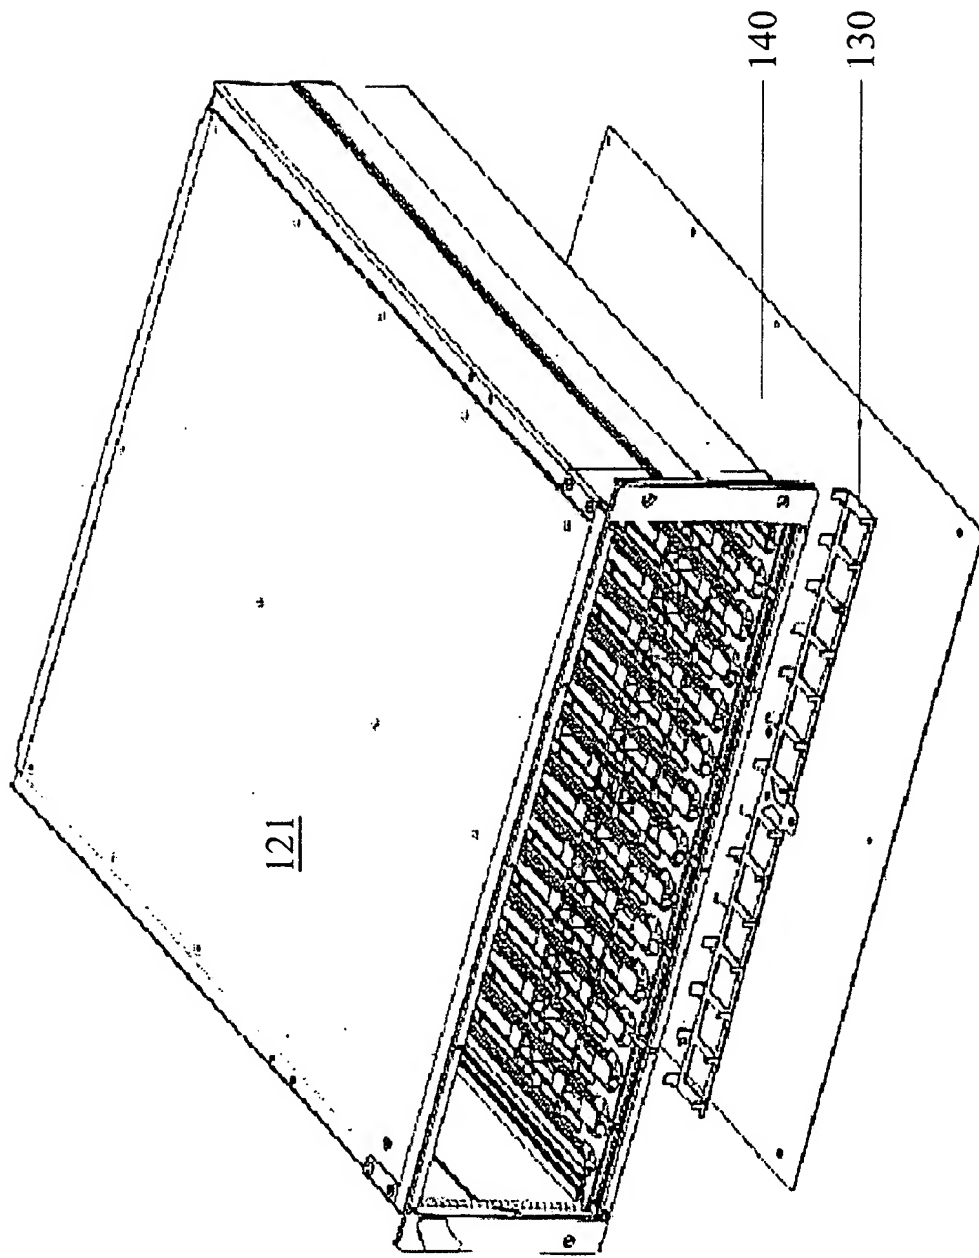


FIG. 6

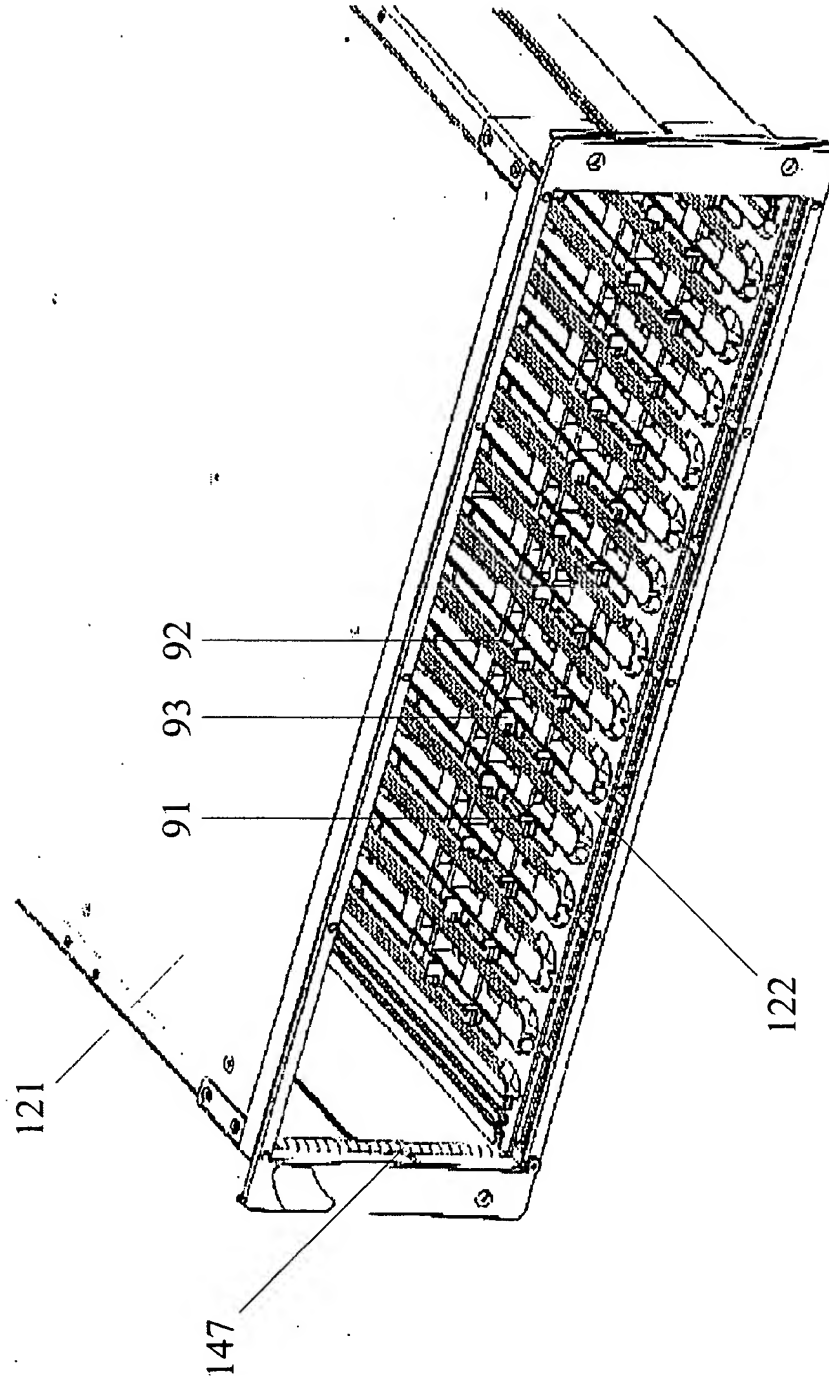


FIG. 7

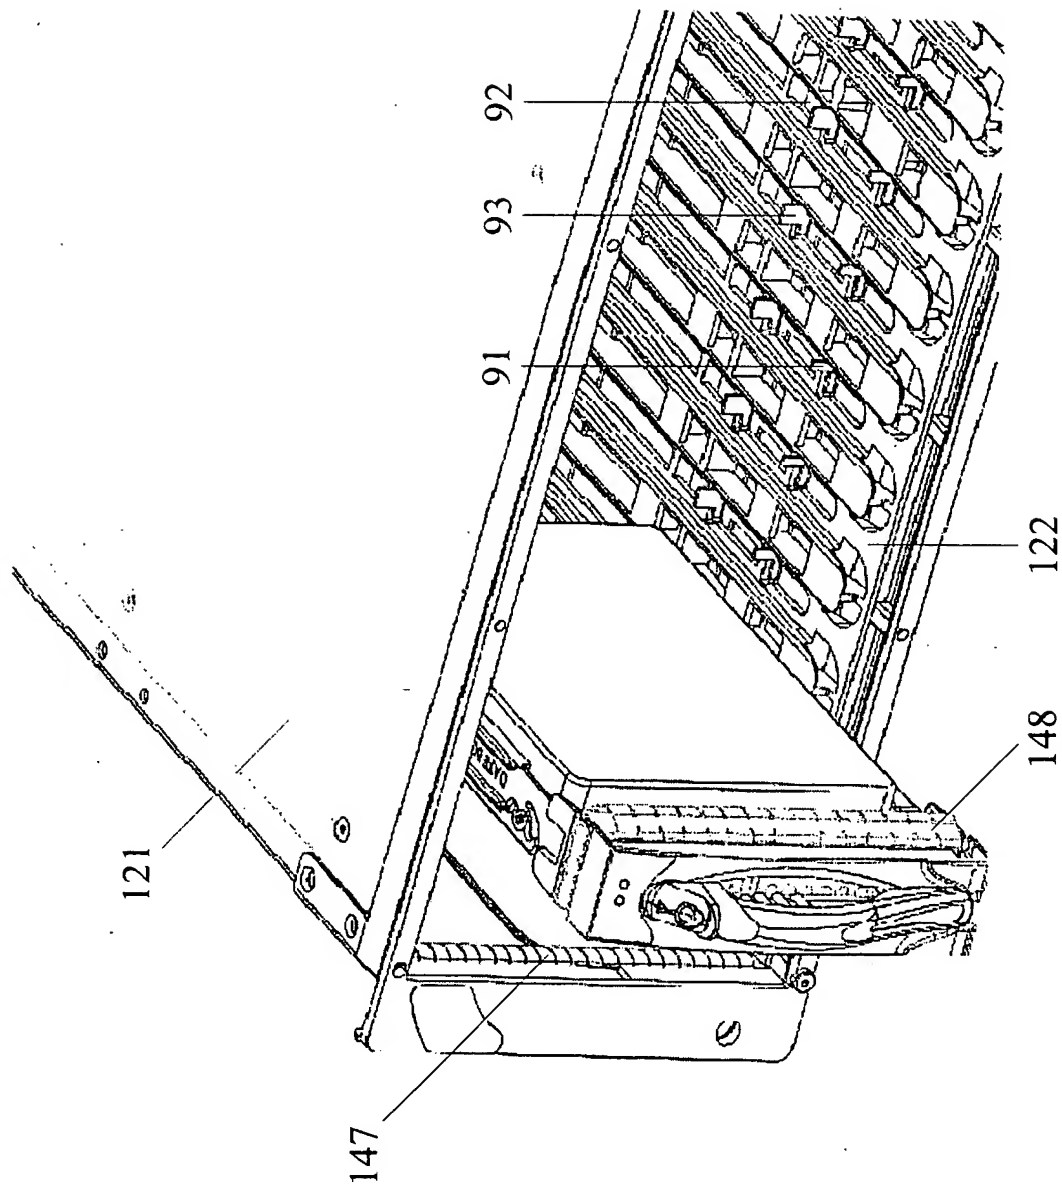


FIG. 8



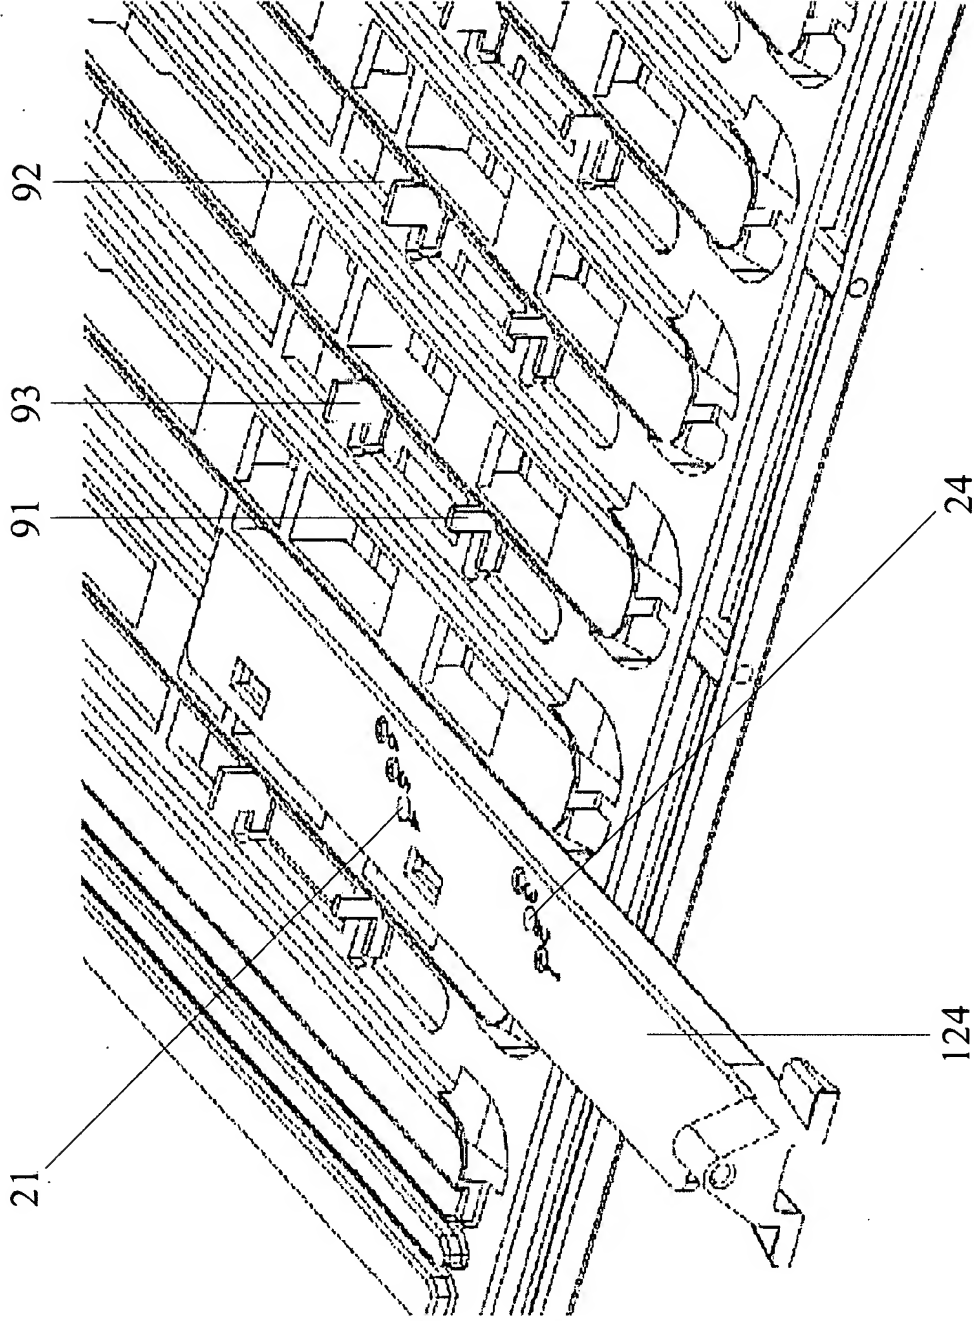


FIG. 9

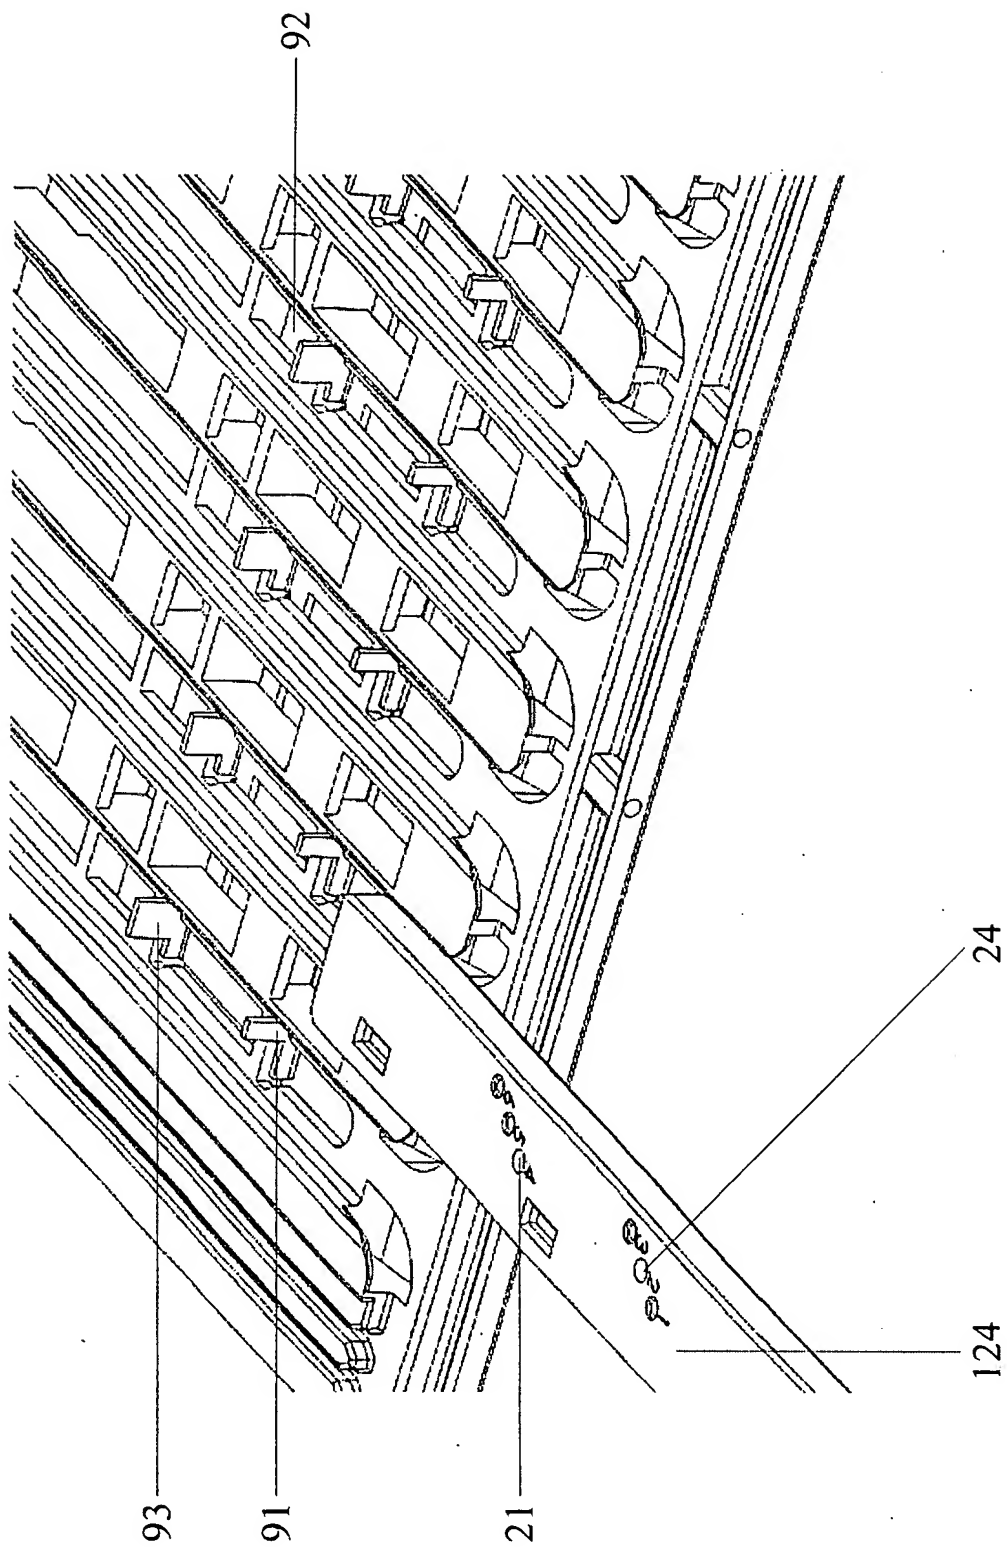


FIG. 10

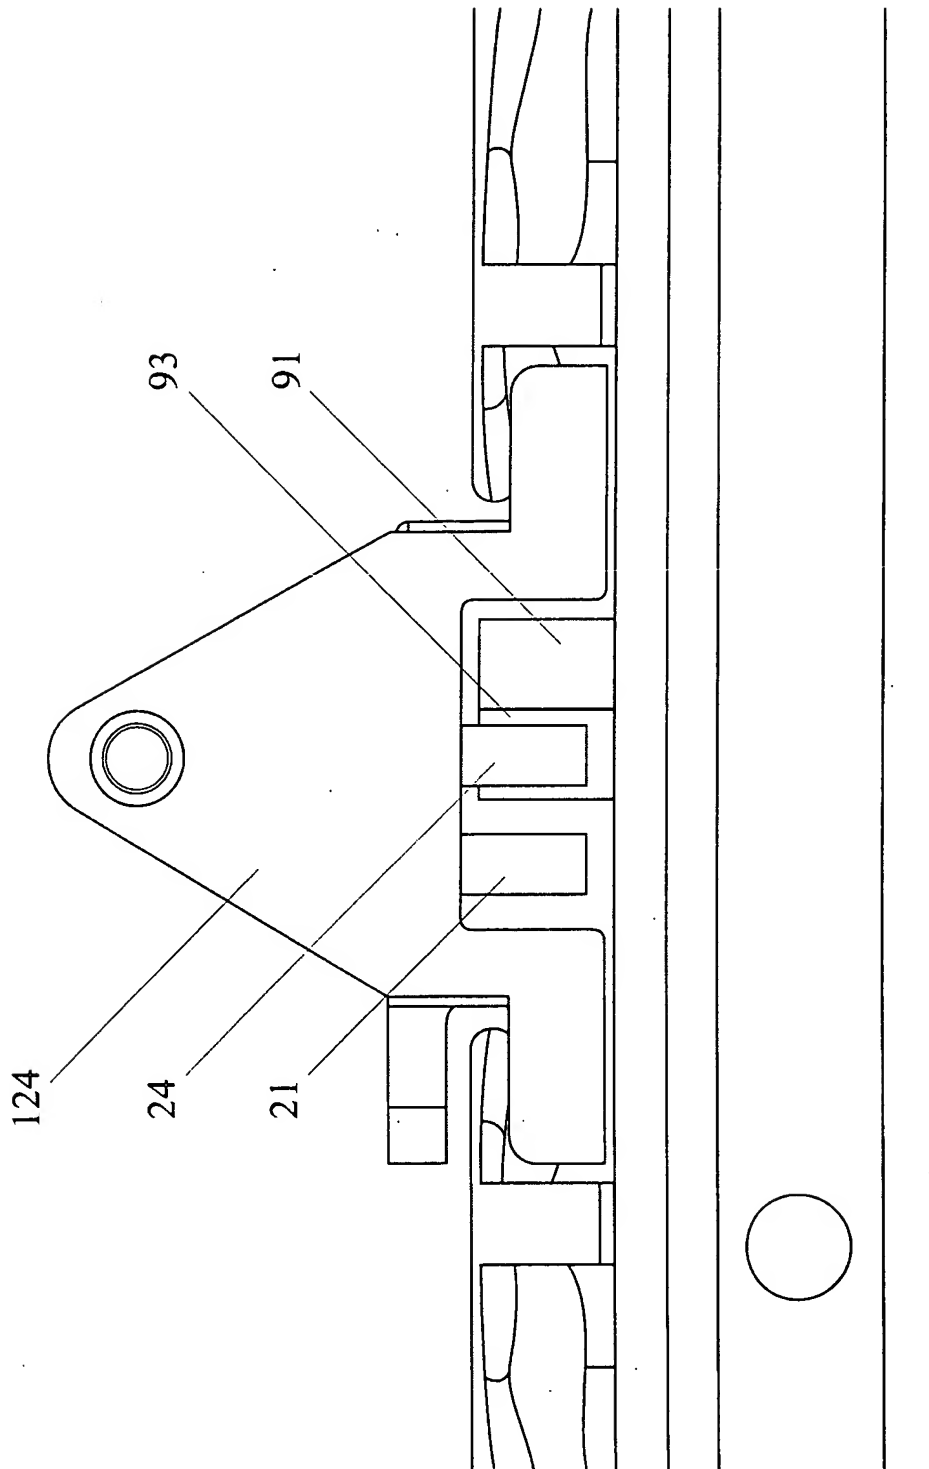


FIG. 11

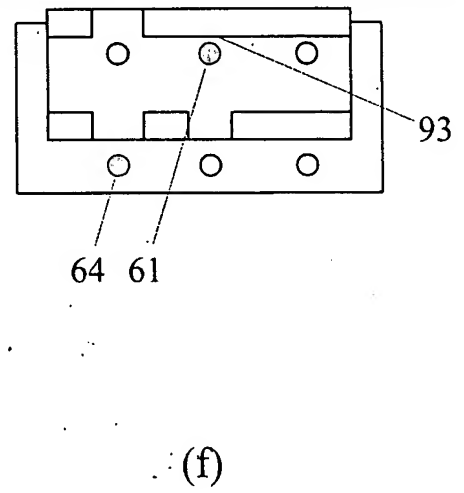
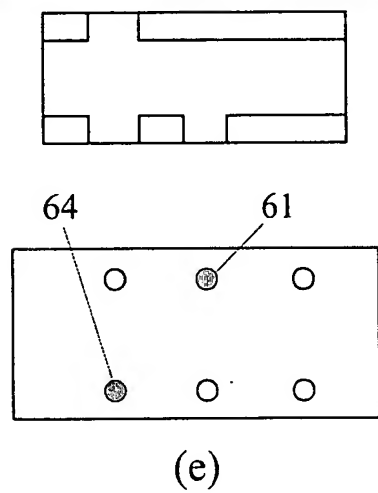
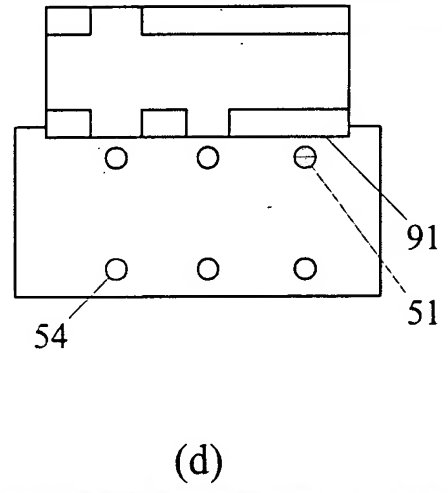
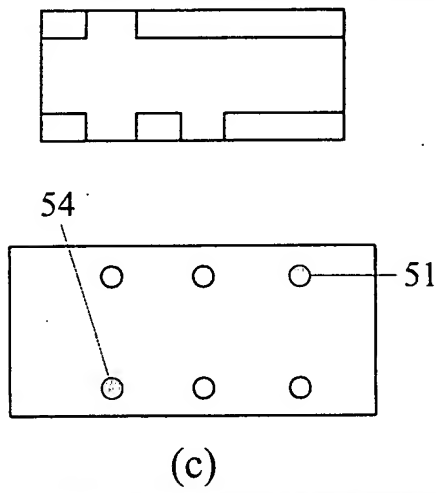
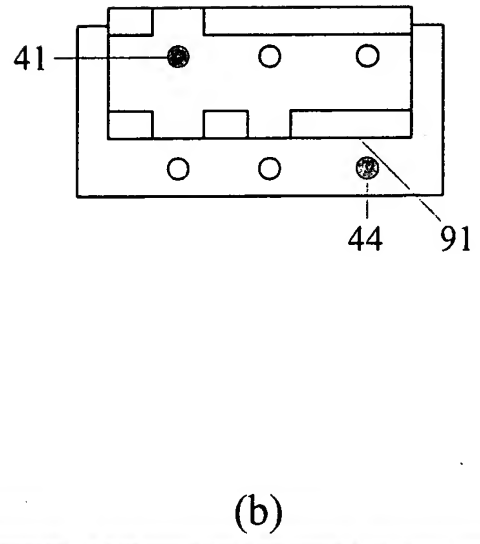
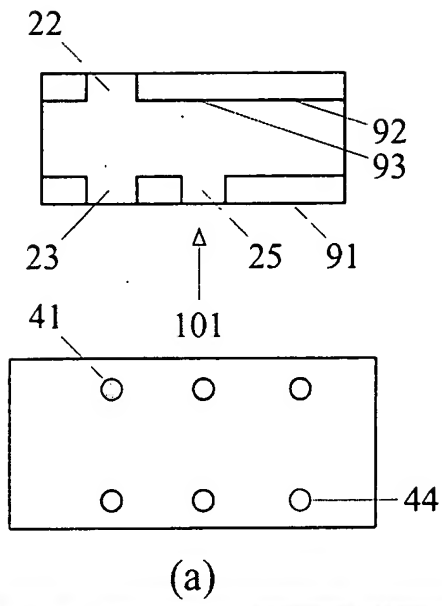


FIG. 12